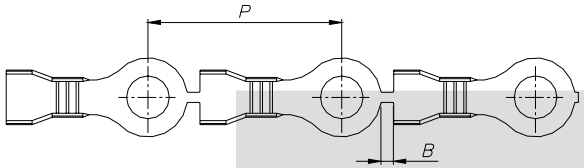

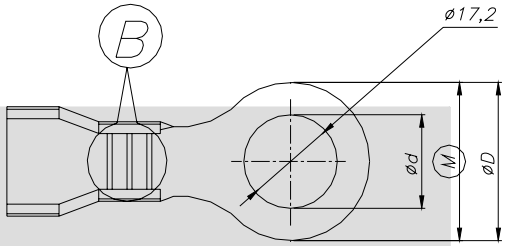



DETAIL B

PULL PUSH RESULT		
DESCRIPTION	AT 1ST INSERTION	AT 10TH WITHDRAWAL
PUSH LOAD MAX.	N A	
PULL LOAD MIN.		N A
MAX. MV. DROP	N A	
MAX. MV. DROP		N A

DIMENSION CLASSIFICATION	
SYMBOL	DESCRIPTION
◢	CRITICAL

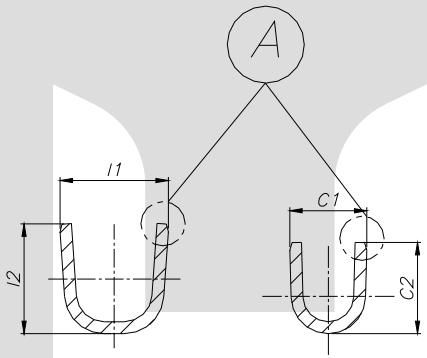

SECTION A–A

SECTION B–B

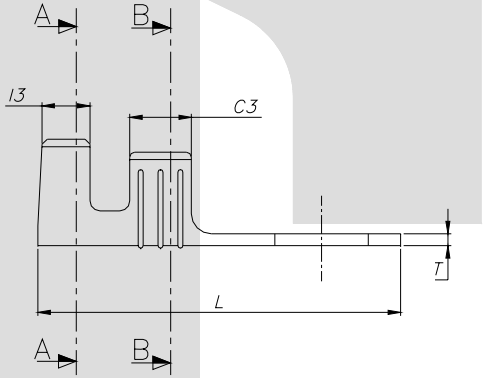



SECTION D–D



DETAIL A

CAT. NO.	L	T	ød	øD	C1	C2	C3	I1	I2	I3	C	S	D	P	B
TOLERANCE	+0.2 −0.2	+.02 −.02	+0.1 −0.1	+.05 −.15	+0.3 −0.3	+0.3 −0.3	+0.1 −0.1	+0.3 −0.3	+0.3 −0.3	+0.1 −0.1	+0.2 −0.3	+.06 −.06	+0.5 −0.5	+.05 −.05	+.00 −.15
TT– 1410	36.5	1.20	9.40	16.0	8.00	9.50	7.50	11.0	10.8	4.80	0.70	0.24	1.20	39.0	2.50

CONTROLLED COPY
TTPL

NOTES:–

MATERIAL	70/30 BRASS
FINISH	NATURAL
THICKNESS	$1.20^{\pm 0.02}$
HARDNESS IN VPN	120 – 140

TT–1410



TERMINAL PITCH $39.00^{+0.05}_{-0.05}$

PLATING THICKNESS:– 1.50 MICRON MIN.IN CASE OF PLATING

REV.NO.	AL. NO.	WAS	CHANGED TO	DATE	NAME	CHD.BY.	ECN NO.

GEN.TOL.		CAT.NO.	TAB SIZE	CABLE SIZE	ALL DIMENSIONS ARE IN MM
0-10	±0.10	TT-1410	--------	8.0 - 15.0 mm^2	
10-30	±0.20	DRN. BY: VENU	CHECKED BY: SANTOSH	APPROVED_BY_DATE: SUJESH	FILENAME: Tt-1410 / DATE: 15-05-06 / SCALE: 2:1
30-100	±0.30	TERMINAL TECHNOLOGIES (I) PVT. LTD.			RING TERMINAL
100-300	±0.50				DRAWING_NUMBER: D/TT/322.R0 / SHEET: 1 OF 1

ISSUE NO–1/17–10–02