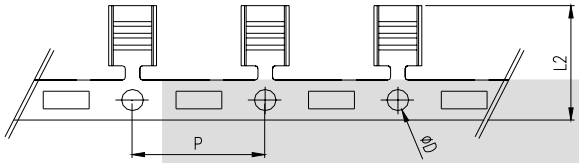



SECTION C–C





DETAIL B



SECTION D–D



DETAIL A

PUSH PULL RESULT		
DESCRIPTION	AT 1ST INSERTION	AT 10TH WITHDRAWAL
PUSH LOAD MAX.	N A.	
PULL LOAD MIN.		N A.
MAX. MV. DROP AT 4A	N A.	
MAX. MV. DROP AT 4A		N A.

DIMENSION CLASSIFICATION	
SYMBOL	DESCRIPTION
◢	CRITICAL

CAT. NO.	L	L2	W	H	ØD	C	S	D	P
TOLERANCE	+0.3 −0.3	+0.1 −0.2	+0.3 −0.3	+0.3 −0.3	+0.1 −0.1	+0.1 −0.1	+.04 −.04	+0.3 −0.3	+.05 −.05
TT– 1435	5.40	10.2	4.00	4.20	2.00	0.20	0.10	0.50	11.0

NOTES:–

MATERIAL	70/30 BRASS
FINISH	NATURAL
THICKNESS	$0.40^{\pm 0.02}$
HARDNESS IN VPN	130 – 160

TT–1435

TERMINAL PITCH $11.00^{+0.05}_{-0.05}$

PLATING THICKNESS:– 1.50 MICRON MIN.IN CASE OF PLATING

NOTE : REWINDING NOT REQUIRED.

CONTROLLED COPY
TTPL

REV.NO.	AL. NO.	WAS	CHANGED TO	DATE	NAME	CHD.BY.

GEN.TOL		CAT.NO.	TAB SIZE	CABLE SIZE	ALL DIMENSIONS ARE IN MM
0-10	±0.10	TT-1435	---------	1.0 - 3.0mm 2	
10-30	±0.20	DRN. BY: VENU	CHECKED BY: SANTOSH	APPROVED_BY_DATE: SUJESH	FILENAME: Tt-1435
30-100	±0.30	DATE: 21-3-06	SCALE: 3:1		
100-300	±0.50	TERMINAL TECHNOLOGIES (I) PVT. LTD.	JOINT TERMINAL (CENTRE SPLICE)		
		DRAWING_NUMBER D/TT/313.R0	SHEET 1 OF 1		

ISSUE NO–1/17–10–02