






CONTROLLED COPY
TTPL

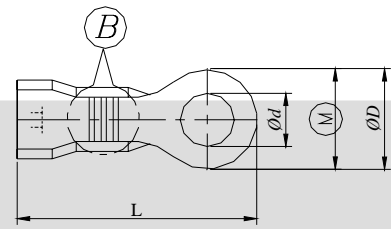


DETAIL B

PULL PUSH RESULT		
DESCRIPTION	AT 1ST INSERTION	AT 10TH WITHDRAWAL
PUSH LOAD MAX.	N.A	
PULL LOAD MIN.		N.A
MAX. MV. DROP	N.A	
MAX. MV. DROP		N.A

DIMENSION CLASSIFICATION	
SYMBOL	DESCRIPTION
▲	CRITICAL

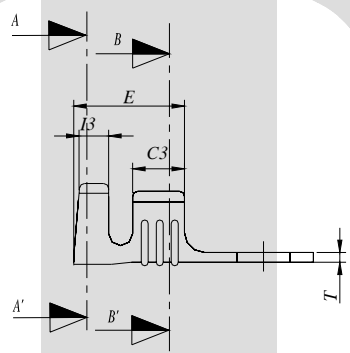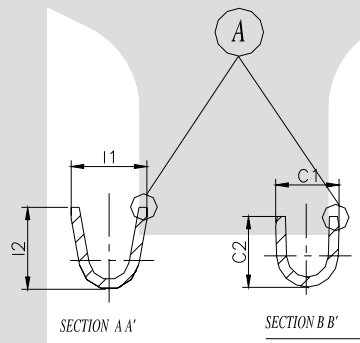

SECTION D-D




DETAIL A

CAT NO.	L	ØD	Ød	T	C1	C2	C3	I1	I2	I3	C	S	D	P	B
TOLERANCE	+0.20 -0.20	+0.05 -0.20	+0.10 -0.10	+0.02 -0.02	+0.20 -0.20	+0.30 -0.30	+0.10 -0.10	+0.20 -0.20	+0.30 -0.30	+0.10 -0.10	+0.20 -0.30	+0.05 -0.05	+0.50 -0.30	+0.05 -0.05	+0.00 -0.10
TT-1508	24.0	10.00	5.40	1.00	6.70	7.50	5.30	8.00	8.50	3.20	0.60	0.20	1.20	26.0	2.00

NOTES:-

MATERIAL	BRASS
FINISH	NATURAL
THICKNESS	±0.02 1.00
HARDNESS IN VPN	120 - 140

TT-1508



TERMINAL PITCH 26.0^{+0.05}/_{-0.05}
 PLATING THICKNESS:- 1.50 MICRON MIN. IN CASE OF PLATING
 TERMINAL INSERTION FORCE INTO COUPLER:- NA
 TERMINAL WITHDRAWAL FORCE FROM COUPLER:- NA

REV. NO.	AL. NO.	WAS	CHANGED TO	DATE	NAME	CHD. BY.	ECN NO.
01	S	0.20 ^{+0.10} / _{-0.10}	0.20 ^{+0.05} / _{-0.05}	28/04/04	AM	BN	73
01	C2, I2, D	7.30, 8.30, 0.50	7.50, 8.50, 1.20	28/04/04	AM	BN	73

GEN TOL.	CAT NO	TAB SIZE	CABLE SIZE	ALL DIMENSIONS ARE IN MM			
0-10 ±0.1	TT-1508	-	3.0-5.0mm ²				
10-30 ±0.2	DRN BY MRN/SSM	CHECKED BY SANTOSH	APPD BY & DATE SUJESH	FILENAME TT-1508	DATE 20-1-04	SCALE	
30-10 ±0.3	TT						
100-300 ±0.5	TERMINAL TECHNOLOGIES (I) PVT. LTD.			DRAWING NUMBER	D/TT/241R01	SHEET 1 OF 1	