

PUSH PULL RESULT		
DESCRIPTION	AT 1ST INSERTION	AT 10TH WITHDRAWAL
PUSH LOAD MAX.	N A.	
PULL LOAD MIN.		N A.
MAX. MV. DROP AT	N A.	
MAX. MV. DROP AT		N A.

DIMENSION CLASSIFICATION	
SYMBOL	DESCRIPTION
▲	CRITICAL

CAT. NO.	L	W	H	C	S	D	H1	W1	P	ød1
TOLERANCE	+0.3 -0.3	+0.2 -0.2	+0.2 -0.2	+0.1 -0.1	+0.04 -0.04	+0.3 -0.3	+0.4 -0.2	+0.1 -0.1	+0.05 -0.05	+0.1 -0.1
TT- 1521	6.00	3.20	3.20	0.25	0.10	0.60	10.0	3.00	8.50	1.80



NOTES:-

MATERIAL	70/30 BRASS
FINISH	NATURAL
THICKNESS	0.50 <sup>+0.02</sup>
HARDNESS IN VPN	120 - 140


TT-1521

TERMINAL PITCH 8.50<sup>+0.05</sup><sub>-0.05</sub>


PLATING THICKNESS:- 1.50 MICRON MIN.IN CASE OF PLATING

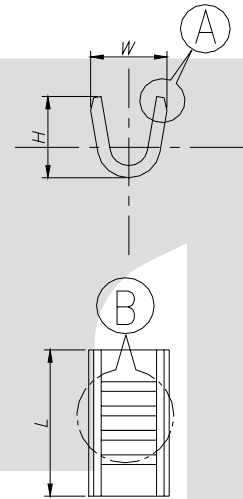

DETAIL B



SECTION D-D



DETAIL A

**CONTROLLED COPY  
TTPL**

01	H1, P	Interchanged by mistake (8.50, 10.0)	10.0, 8.50	27/10/04	AM	BN	111
REV.NO.	AL. NO.	WAS	CHANGED TO	DATE	NAME	CHD.BY.	ECN NO.
GEN TOL.	CAT NO	TAB SIZE	CABLE SIZE	ALL DIMENSIONS ARE IN MM			
0-10 ±0.10	TT-1521	-----	0.50 - 1.50 mm <sup>2</sup>				
10-30 ±0.20	DRN BY	CHECKED BY	APPROVED BY DATE	FILENAME	DATE	SCALE	
	VENU	SANTOSH	SUJESH	Tt-1521	16-3-04	5:1	
30-100 ±0.30				JOINT TERMINAL (CENTRE SPLICE)			
100-300 ±0.50				TERMINAL TECHNOLOGIES (I) PVT. LTD.	DRAWING_NUMBER	D/TT/256.R01	SHEET