TERMINAL TO TERMINAL (MALE WITH FEMALE)		
DESCRIPTION	AT 1ST INSERTION	AT 10TH WITHDRAWAL
PUSH LOAD MAX.	N A	
PULL LOAD MIN.		N A
MAX. MV. DROP AT 4.0A	N A	
MAX. MV. DROP AT 4.0A		N A

DIMENSION CLASSIFICATION	
SYMBOL	DESCRIPTION
◢	CRITICAL

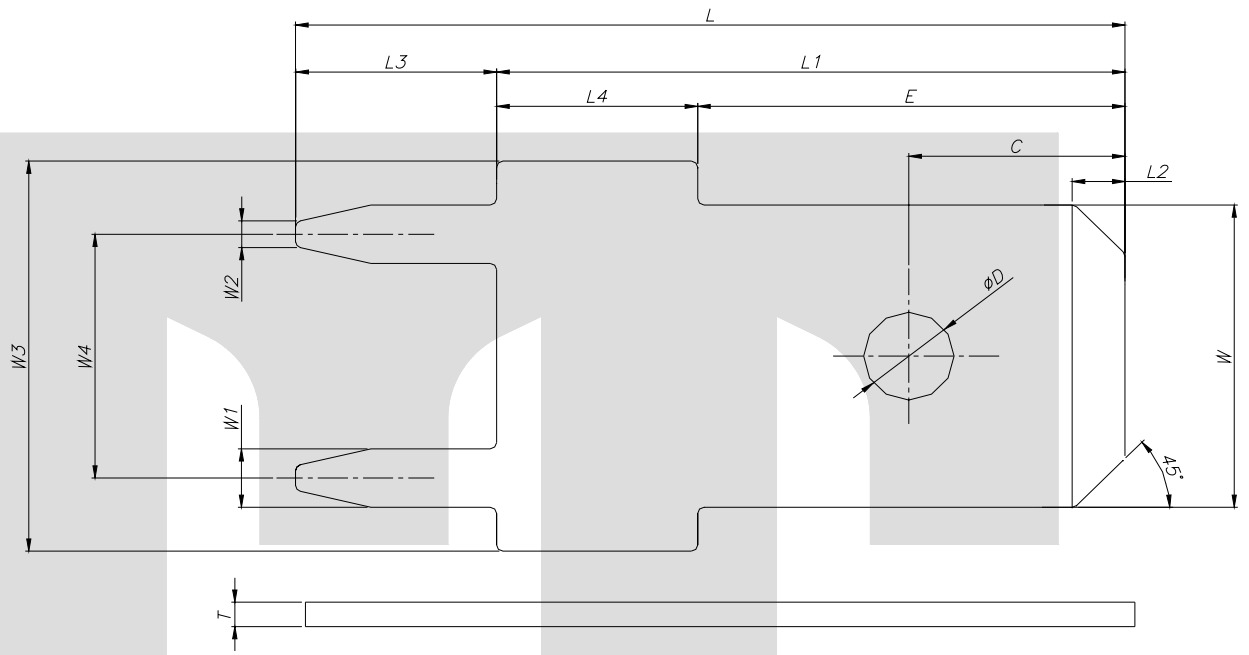

CAT NO.	L	L1	C	T	E	W	W1	W2	W3	W4	øD	L2	L3	L4
TOLERANCE	+0.3 −0.3	+0.3 −0.3	+0.2 −0.4	+.02 −.02	+0.3 −0.3	+0.1 −0.1	+0.1 −0.1	+0.15 −0.15	+0.2 −0.2	+0.1 −0.1	+0.1 −0.1	+0.3 −0.3	+0.2 −0.2	+0.2 −0.2
TT− 1536	16.7	12.8	4.60	0.80	8.40	6.30	1.20	0.85	8.10	5.00	1.80	1.00	3.80	4.50



PCB BOARD LAYOUT

NOTES:−

MATERIAL	70/30 BRASS
FINISH	NATURAL
THICKNESS	$0.80^{\pm 0.02}$
HARDNESS IN VPN	115 − 135

CONTROLLED COPY
TTPL

TT−1536

TERMINAL PITCH $10.00^{+0.05}_{-0.05}$

PLATING THICKNESS:− 1.50 MICRON MIN.IN CASE OF PLATING
TERMINAL INSERTION FORCE INTO COUPLER:− NA
TERMINAL WITHDRAWL FORCE INTO COUPLER:− NA

REV NO	AL. NO.	WAS	CHANGED TO	DATE	NAME	CHD.BY.

GEN.TOL.		CAT.NO.	TAB SIZE	CABLE SIZE	ALL DIMENSIONS ARE IN MM
0-10	±0.10	TT−1536	6.30 X 0.80	NA	
10-30	±0.20	DRN. BY: VENU	CHECKED BY: SANTOSH	APPROVED_BY_DATE: SUJESH	FILENAME: Tt-1536
30-100	±0.30				DATE: 1-6-04
100-300	±0.50				SCALE: 10:1

TERMINAL TECHNOLOGIES (I) PVT. LTD.

PC BOARD MOUNT MALE TAB

DRAWING_NUMBER D/TT/271.R0

SHEET 1 OF 1

ISSUE NO−1/17−10−02