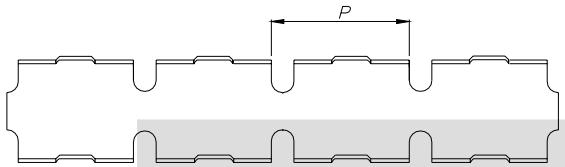

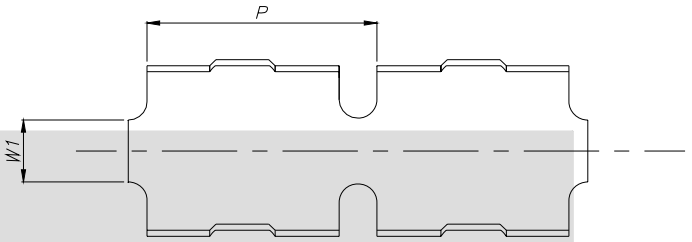

TERMINAL TO TERMINAL (MALE WITH FEMALE)		
DESCRIPTION	AT 1ST INSERTION	AT 10TH WITHDRAWAL
PUSH LOAD MAX.	N A.	
PULL LOAD MIN.		N A.
MAX. MV. DROP AT 10A	N A.	
MAX. MV. DROP AT 10A		N A.

DIMENSION CLASSIFICATION	
SYMBOL	DESCRIPTION
◢	CRITICAL



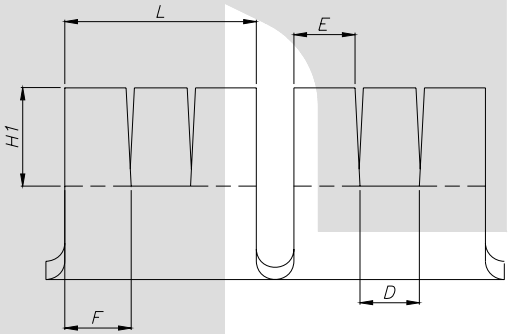

CAT. NO.	L ◢	E	W ◢	H ◢	H1	C	D	F	P ◢	W1	T
TOLERANCE	+0.1 −0.1	+0.1 −0.1	+.15 −.15	+0.1 −0.1	+0.2 −0.1	+0.1 −0.1	+0.1 −0.1	+0.1 −0.1	+.05 −.05	+0.1 −0.1	+.02 −.02
TT− 1569	7.60	2.45	6.70	7.70	4.10	3.30	2.36	2.65	9.15	2.54	0.50

CONTROLLED COPY
TTPL

NOTES:−

MATERIAL	H 14 ALUMINIUM
FINISH	NATURAL
THICKNESS	$0.50^{\pm 0.02}$
HARDNESS IN VPN	100 − 120

TT−1569

UNSPECIFIED RADIUS IS 0.3
UNSPECIFIED CHAMFER IS 0.5
TERMINAL PITCH $9.15^{+0.05}_{-0.05}$

REV.NO.	AL. NO.	WAS	CHANGED TO	DATE	NAME	CHD.BY.

GEN.TOL.		CAT.NO.	TAB SIZE	CABLE SIZE	ALL DIMENSIONS ARE IN MM
0-10	±0.10	TT-1569	--------	2.0-3.0 mm^2	
10-30	±0.20	DRN BY: VENU	CHECKED BY	APPROVED_BY_DATE	FILENAME: Tt-1569 / DATE: 26-04-05 / SCALE: 5:1
30-100	±0.30	TERMINAL TECHNOLOGIES (I) PVT. LTD.			IDENTIFICATION BAND
100-300	±0.50			DRAWING_NUMBER D/TT/298.R0	SHEET 1 OF 1

ISSUE NO−1/17−10−02