

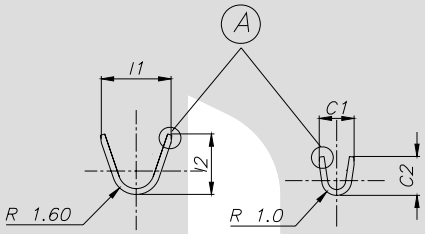

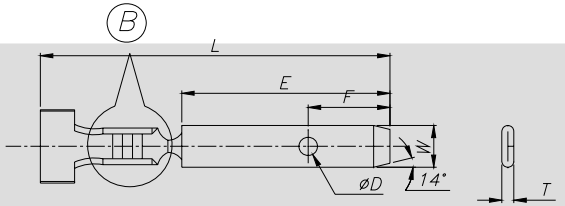

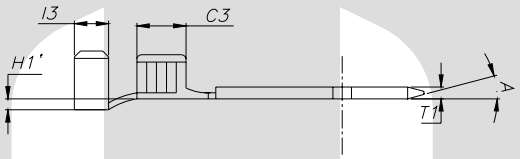





SECTION DD



DETAIL A

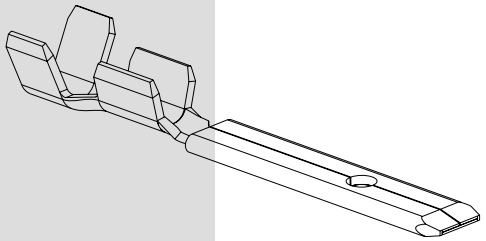

PULL PUSH REPORT		
DESCRIPTION	AT 1ST INSERTION	AT 10TH WITHDRAWAL
PUSH LOAD MAX.	N A	
PULL LOAD MIN.		N A
MAX. MV. DROP AT 4A	N A	
MAX. MV. DROP AT 4A		N A

DIMENSION CLASSIFICATION	
SYMBOL	DESCRIPTION
◢	CRITICAL

CAT NO.	L	L1	E	F	W	C1 ◢	C2	C3 ◢	I1	I2	I3	H1	S	D	P	ØD	T ◢	T1 ◢	C	A
TOLERANCE	+0.2 −0.2	+0.2 −0.2	+0.1 −0.1	+0.1 −0.1	+.05 −.05	+0.2 −0.2	+0.3 −0.3	+0.1 −0.1	+0.3 −0.3	+0.3 −0.3	+0.1 −0.1	+0.1 −0.1	+.02 −.02	+0.3 −0.3	+.05 −.05	+0.1 −0.1	+.02 −.02	+.05 −.05	+0.1 −.05	+0.1 −0.1
TT−1572	23.5	27.0	14.0	5.50	2.85	2.60	2.60	3.30	4.00	3.40	2.30	0.40	0.10	0.60	12.0	1.25	0.38	0.80	0.15	15°

NOTES:−

MATERIAL	70/30 BRASS
FINISH	NICKEL
THICKNESS	$0.38^{\pm 0.02}$
HARDNESS IN VPN	120 − 140

TT−1572

UNSPECIFIED RADIUS IS 0.3
UNSPECIFIED CHAMFER IS 0.5

TERMINAL PITCH $12.00^{+0.05}_{-0.05}$

PLATING THICKNESS:− 1.0 MICRON

CONTROLLED COPY
TTPL

REV.NO.	AL. NO.	WAS	CHANGED TO	DATE	NAME	CHD.BY.

GEN.TOL.	
0-10	±0.10
10-30	±0.20
30-100	±0.30
100-300	±0.50

CAT.NO.	TAB SIZE	CABLE SIZE	
TT-1572	2.80 X 0.80	0.75 -- 1.50mm^2	ALL DIMENSIONS ARE IN MM

DRN. BY	CHECKED BY	APPROVED_BY_DATE	FILENAME	DATE	SCALE
VEMU			TT-1572	8-5-05	3:1

TERMINAL TECHNOLOGIES (I) PVT. LTD.

CONNECTOR TERMINAL

DRAWING_NUMBER D/TT/301. R0 | SHEET 1 OF 1

ISSUE NO−1/17−10−02