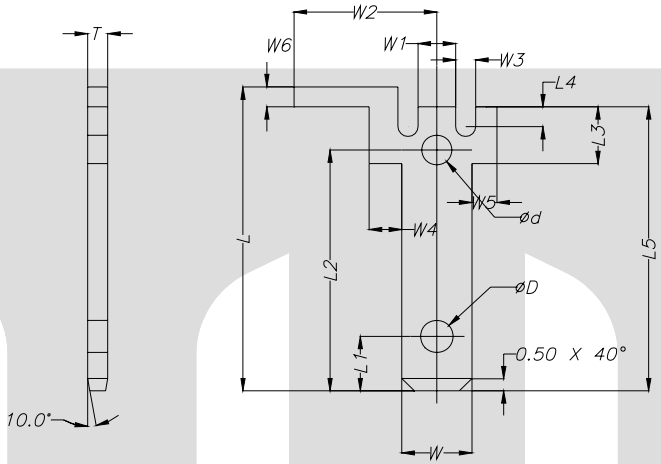

DESCRIPTION	AT 1ST INSERTION	AT 10TH WITHDRAWAL
PUSH LOAD MAX.	NA	
PULL LOAD MIN.		NA
MAX. MV. DROP	N A	
MAX. MV. DROP		N A

DIMENSION CLASSIFICATION	
SYMBOL	DESCRIPTION
◢	CRITICAL

CAT. NO.	L ◢	LI	L2	L3	L4	L5 ◢	W ◢	W1	W2 ◢	W3	W4	W5	W6 ◢	øD ◢	ød	T
TOLERANCE	+0.2 −0.2	+0.2 −0.0	+0.2 −0.2	+.05 −.05	+0.1 −0.1	+0.1 −0.1	+.05 −0.1	+0.1 −0.1	+0.1 −0.1	+0.1 −0.1	+0.1 −0.1	+0.1 −0.1	+0.0 −.05	+0.1 −0.1	+0.1 −0.1	+.05 −.05
TT− 1601	12.3	2.20	9.75	2.30	0.80	11.5	2.80	1.50	5.70	0.80	1.3	1.0	0.80	1.30	1.20	0.80

CONTROLLED COPY
TTPL

NOTES:−

MATERIAL	*BRASS*
FINISH	*TIN*
THICKNESS	$0.80^{\pm 0.02}$
HARDNESS IN VPN	*120−140*

TT−1601

TERMINAL PITCH 10.0 $^{+0.05}_{-0.05}$

PLATING THICKNESS:− 1.50 MICRON MIN.IN CASE OF PLATING

REV.NO.	AL. NO.	WAS	CHANGED TO	DATE	NAME	CHD.BY.	ECN NO.

GEN.TOL.		CAT.NO.	TAB SIZE	CABLE SIZE	ALL DIMENSIONS ARE IN MM
0-10	±0.10	TT-1601	N A	----------	
10-30	±0.20	DRN. BY VENU	CHECKED BY SANTOSH	APPROVED_BY_DATE SUJESH	FILENAME Tt-1601 / DATE 2-9-06 / SCALE 5:1
30-100	±0.30	TERMINAL TECHNOLOGIES (I) PVT. LTD.		MALE TAB (2101 2166 82 97)	
100-300	±0.50			DRAWING_NUMBER D/TT/359,R0	SHEET 1 OF 1

ISSUE NO−1/17−10−02