DESCRIPTION	AT 1ST INSERTION	AT 10TH WITHDRAWAL
PUSH LOAD MAX.	NA	
PULL LOAD MIN.		NA
MAX. MV. DROP	N A	
MAX. MV. DROP		N A

DIMENSION CLASSIFICATION	
SYMBOL	DESCRIPTION
◢	CRITICAL

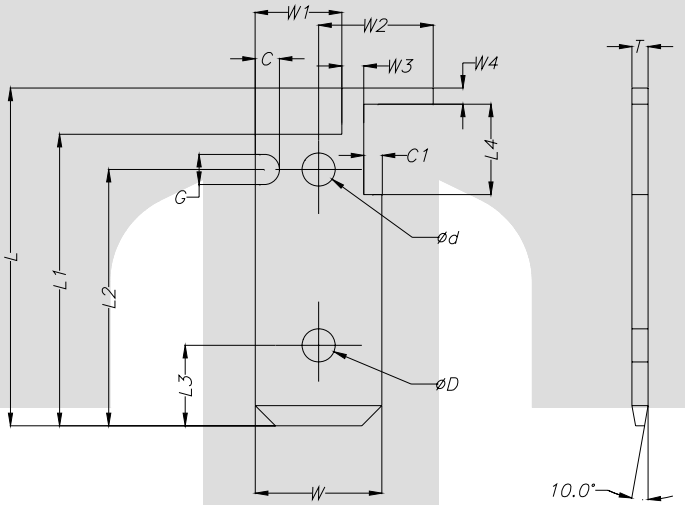

CAT. NO.	L ◢	LI ◢	L2	L3	L4	W ◢	W1 ◢	W2	W3	W4	C	C1	øD ◢	ød	T	G
TOLERANCE	+0.2 −0.2	+0.2 −0.2	+0.2 −0.2	+0.1 −0.1	+0.1 −0.1	+.05 −0.1	+0.1 −0.1	+0.1 −0.1	+0.1 −0.1	+0.0 −.05	+0.1 −0.1	+0.1 −0.1	+0.1 −0.1	+0.1 −0.1	+.05 −.05	+0.1 −0.1
TT− 1602	16.8	14.5	12.75	4.0	4.50	6.30	4.30	5.7	1.1	0.80	1.20	0.90	1.65	1.65	0.80	1.5

CONTROLLED COPY
TTPL

NOTES:−

MATERIAL	*BRASS 63/37*
FINISH	*TIN*
THICKNESS	$0.80^{\pm 0.02}$
HARDNESS IN VPN	*120−140*

TT−1602

PLATING THICKNESS:− 1.50 MICRON MIN.IN CASE OF PLATING

REV.NO.	AL. NO.	WAS	CHANGED TO	DATE	NAME	CHD.BY.	ECN NO.

GEN.TOL.		CAT.NO.	TAB SIZE	CABLE SIZE	ALL DIMENSIONS ARE IN MM
0-10	±0.10	TT-1602	N A	----------	
10-30	±0.20	DRN. BY VENU	CHECKED BY	APPROVED_BY_DATE	FILENAME Tt-1602 / DATE 2-9-06 / SCALE 4:1
30-100	±0.30	TERMINAL TECHNOLOGIES (I) PVT. LTD.			6.30 MALE TAB (2101 2167 82 01)
100-300	±0.50				DRAWING_NUMBER D/TT/360,R0 / SHEET 1 OF 1

ISSUE NO−1/17−10−02