


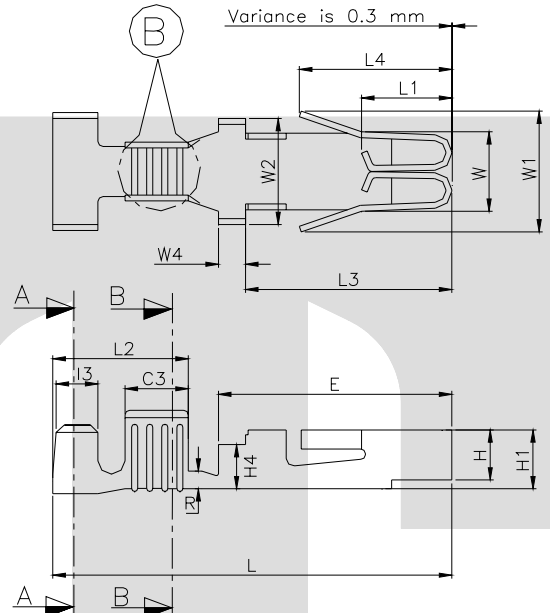


DESCRIPTION	AT 1ST INSERTION	AT 10TH WITHDRAWAL
PUSH LOAD MAX.	NA	
PULL LOAD MIN.		NA
MAX. MV. DROP	N A	
MAX. MV. DROP		N A


DIMENSION CLASSIFICATION	
SYMBOL	DESCRIPTION
▲	CRITICAL

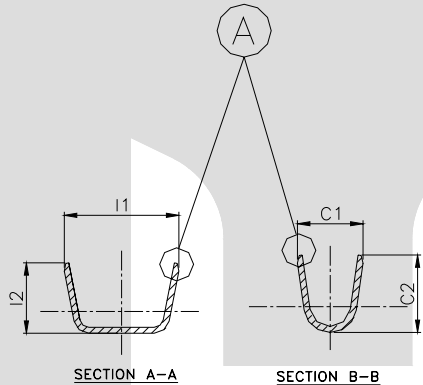

DETAIL B



SECTION D-D



DETAIL A

CAT. NO.	L	L1	L2	L3	L4	E	W	W1	W2	H	H1	C1	C2	C3	I1	I2	I3	R	S	C	D	P	ød1	H2	W3	H4	W4
TOLERANCE	+0.3 -0.3	+0.5 -0.1	+0.2 -0.2	+0.3 -0.2	+0.1 -0.2	+0.2 -0.2	+0.2 -0.1	+0.15 -0.3	+0.1 -0.1	+0.2 -0.2	+0.1 -0.1	+0.2 -0.2	+0.3 -0.3	+0.1 -0.1	+0.2 -0.2	+0.3 -0.1	+0.1 -0.1	+0.15 -0.0	+0.04 -0.04	+0.1 -0.1	+0.3 -0.3	+0.05 -0.05	+0.1 +0.1	+0.2 -0.2	+0.1 -0.2	+0.1 -0.1	+0.15 -0.1
TT- 1603	26.5	6.00	9.00	13.4	9.9	15.5	5.20	8.00	7.20	3.50	4.00	5.0	5.40	4.30	7.70	4.70	2.80	1.10	0.10	0.25	0.50	15.0	2.00	32.2	3.40	3.10	1.80

NOTES:-

MATERIAL	70/30 BRASS
FINISH	TIN
THICKNESS	0.40 ^{+0.02}
HARDNESS IN VPN	130-160

TT-1603

CONTROLLED COPY
TTPL

TERMINAL PITCH 15.00^{+0.05}/_{-0.05}

PLATING THICKNESS:- 1.50 MICRON MIN. IN CASE OF PLATING
 TERMINAL INSERTION FORCE INTO COUPLER:- 2.50KG.MAX.
 TERMINAL WITHDRAWL FORCE INTO COUPLER:- 6.00.KG.MIN.

05	W4 & Profile	NOT SHOWN	SHOWN (Critical Dimn.)	25/02/06	AM	VENU	185-B
04	L4	NOT SHOWN	SHOWN	11/02/06	AM	VEN	184-B
03	C1	4.40	5.00	20/11/05	AM	VEN	181
02	H4	NOT SHOWN	SHOWN	19/09/05	AM	VEN	174
01	NECK HEIGHT	IMPROVED	R = 1.10 ^{+0.15} / _{-0.0}	25/07/05	AM	VENU	169
REV.NO.	AL. NO.	WAS	CHANGED TO	DATE	NAME	CHD.BY.	ECN NO.
GEN TOL.	CAT NO.	TAB SIZE	CABLE SIZE	ALL DIMENSIONS ARE IN MM			
0-10 ±0.10	TT-1603	NA	2.0-4.0 mm ²				
10-30 ±0.20	DRN BY	CHECKED BY	APPROVED BY DATE	FILENAME	DATE	SCALE	
	VENU	SANTOSH	SUJESH	Tt-1603	4-4-05	3:1	
30-100 ±0.30	TT			FUSE TERMINAL			
100-300 ±0.50	TERMINAL TECHNOLOGIES (I) PVT. LTD.			DRAWING_NUMBER	D/TT/305,R05	SHEET 1 OF 1	