


DESCRIPTION	AT 1ST INSERTION	AT 10TH WITHDRAWAL
PUSH LOAD MAX.	NA	
PULL LOAD MIN.		NA
MAX. MV. DROP	N A	
MAX. MV. DROP		N A

DIMENSION CLASSIFICATION	
SYMBOL	DESCRIPTION
▲	CRITICAL

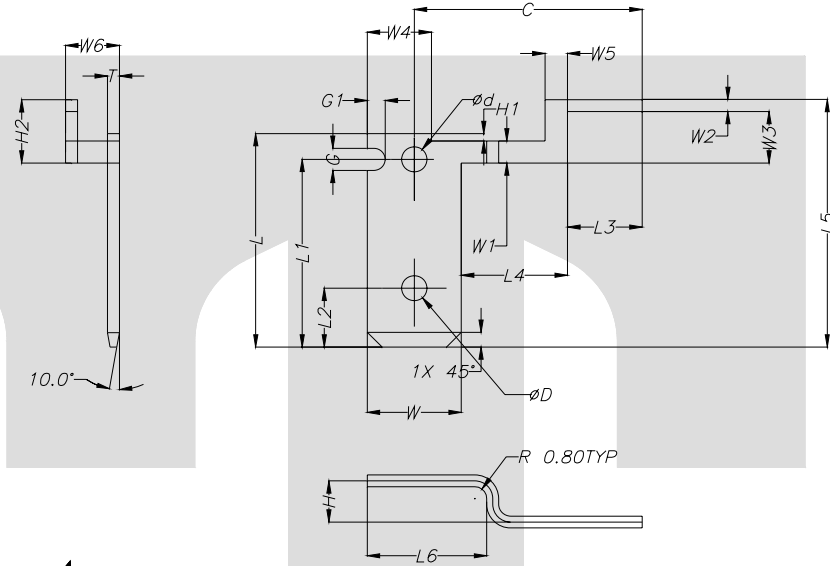

CAT. NO.	L	LI	L2	L3	L4	L5	L6	W	W1	W2	W3	W4	W5	W6	G1	øD	C	ød	T	H	H1	H2
TOLERANCE	+0.2 -0.2	+0.2 -0.2	+0.1 -0.1	+0.1 -0.1	+0.2 -0.2	+0.2 -0.2	+0.1 -0.1	+0.05 -0.05	+0.05 -0.05	+0.00 -0.05	+0.1 -0.1	+0.1 -0.1	+0.1 -0.1	+0.1 -0.1	+0.1 -0.1	+0.1 -0.1	+0.2 -0.2	+0.1 -0.1	+0.05 -0.05	+0.0 -0.05	+0.1 -0.1	+0.1 -0.1
TT- 1604	14.5	12.75	4.00	5.00	7.10	16.80	8.00	6.30	1.50	0.80	3.50	4.30	1.50	4.0	1.20	1.65	15.25	1.65	0.80	2.80	0.5	4.45

CONTROLLED COPY
TTPL

NOTES:-

MATERIAL	BRASS 63\37
FINISH	TIN
THICKNESS	0.80±0.02
HARDNESS IN VPN	120-140

TT-1604

PLATING THICKNESS:- 1.50 MICRON MIN.IN CASE OF PLATING

REV. NO.	AL. NO.	WAS	CHANGED TO	DATE	NAME	CHD. BY.	ECN NO.
GEN. TOL.	CAT. NO.	TAB SIZE	CABLE SIZE	ALL DIMENSIONS ARE IN MM			
0-10 ±0.10	TT-1604	N A	-----				
10-30 ±0.20	DRN. BY VENU	CHECKED BY SANTOSH	APPROVED BY DATE SUJESH	FILENAME TT-1604	DATE 26-9-06	SCALE 3:1	
30-100 ±0.30	TT		MALE TAB(2101 2167 82 00)				
100-300 ±0.50	TERMINAL TECHNOLOGIES (I) PVT. LTD.		DRAWING_NUMBER D/TT/361,RO		SHEET 1 OF 1		