DESCRIPTION	AT 1ST INSERTION	AT 10TH WITHDRAWAL
PUSH LOAD MAX.	NA	
PULL LOAD MIN.		NA
MAX. MV. DROP	N A	
MAX. MV. DROP		N A

DIMENSION CLASSIFICATION	
SYMBOL	DESCRIPTION
◢	CRITICAL





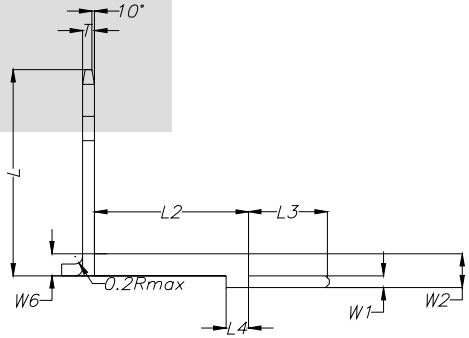

CAT. NO.	L	LI	L2	L3	L4	W	W1	W2	W3	W4	W5	W6	øD	T	H	S	S1
TOLERANCE	+0.2 −0.2	+0.1 −0.1	+0.2 −0.2	+0.1 −0.1	+0.1 −0.1	+.05 −0.1	+0.1 −0.1	+0.1 −0.1	+.05 −.05	+.00 −.05	+0.1 −0.1	+.05 −.00	+0.1 −0.1	+.05 −.05	+0.1 −0.1	+0.1 −0.1	+0.1 −0.1
TT− 1605	15.0	4.00	10.3	5.00	1.50	6.30	0.80	2.30	2.80	1.65	2.50	1.50	1.65	0.80	2.20	1.15	0.80

NOTES:−

MATERIAL	BRASS 63\37
FINISH	TIN
THICKNESS	$0.80^{\pm 0.02}$
HARDNESS IN VPN	120−140

CONTROLLED COPY
TTPL

TT−1605

PLATING THICKNESS:− 1.50 MICRON MIN.IN CASE OF PLATING

REV.NO.	AL. NO.	WAS	CHANGED TO	DATE	NAME	CHD.BY.	ECN NO.

GEN.TOL.		CAT.NO.	TAB SIZE	CABLE SIZE	ALL DIMENSIONS ARE IN MM
0-10	±0.10	TT-1605	N A	----------	
10-30	±0.20	DRN. BY VENU	CHECKED BY SANTOSH	APPROVED_BY_DATE SUJESH	FILENAME Tt-1605 / DATE 26-9-06 / SCALE 2:1
30-100	±0.30	TERMINAL TECHNOLOGIES (I) PVT. LTD.		MALE TAB(2101 2167 82 02)	
100-300	±0.50			DRAWING_NUMBER D/TT/362,R0	SHEET 1 OF 1

ISSUE NO−1/17−10−02