


TERMINAL TO TERMINAL (MALE & FEMALE)		
DESCRIPTION	AT 1ST INSERTION	AT 10TH WITHDRAWAL
PUSH LOAD MAX.	N A	
PULL LOAD MIN.	N A	N A
MAX. MV. DROP AT 10A	10 MV.	
MAX. MV. DROP AT 10A		15 MV.

DIMENSION CLASSIFICATION	
SYMBOL	DESCRIPTION
▲	CRITICAL

CAT. NO.	L	L1	E	C1	C2	C3	I1	I2	I3	G	∅D	T	S	C	D	H	W	P	B
TOLERANCE	+0.2 -0.2	+0.1 -0.1	+0.2 -0.2	+0.2 -0.2	+0.3 -0.3	+0.1 -0.1	+0.2 -0.2	+0.3 -0.3	+0.1 -0.1	+0.3 -0.0	+0.2 -0.1	+0.02 -0.02	+0.02 -0.02	+0.05 -0.1	+0.3 -0.3	+0.1 -0.1	+0.2 -0.2	+0.05 -0.05	+0.00 -0.10
TT- 1610	18.0	7.50	7.50	3.20	3.50	3.50	5.20	5.00	2.30	3.00	6.00	0.35	0.10	0.20	0.50	6.20	4.50	20.0	2.00

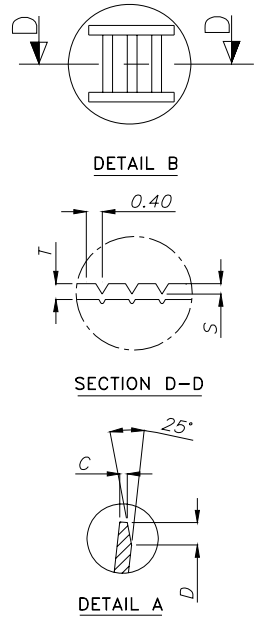

**CONTROLLED COPY
TTPL**

TT-1610

NOTES:-

MATERIAL	70/30 BRASS
FINISH	NATURAL
THICKNESS	0.35 ^{±0.02}
HARDNESS IN VPN	130 - 160

TERMINAL PITCH 20.0^{+0.05}/_{-0.05}

PLATING THICKNESS:- 1.50 MICRON MIN. IN CASE OF PLATING
 TAPER THROUGHOUT DIAMETER :- 0.1mm MAX. ▲
 OVALITY WITHIN 0.15mm MAX. ▲

REV. NO.	AL. NO.	WAS	CHANGED TO	DATE	NAME	CHD. BY.	ECN NO.
GEN TOL.	CAT NO.	TAB SIZE	CABLE SIZE	ALL DIMENSIONS ARE IN MM			
0-10 ±0.10	TT-1610	∅6.50	0.75-2.0mm ²				
10-30 ±0.20	DRN BY VENU	CHECKED BY SANTOSH	APPROVED BY DATE SUJESH	FILENAME Tt-1610	DATE 3-12-06	SCALE 3:1	
30-100 ±0.30	TT			FUSE TERMINAL			
100-300 ±0.50	TERMINAL TECHNOLOGIES (I) PVT. LTD.			DRAWING_NUMBER D/TT/354,RO		SHEET 1 OF 1	