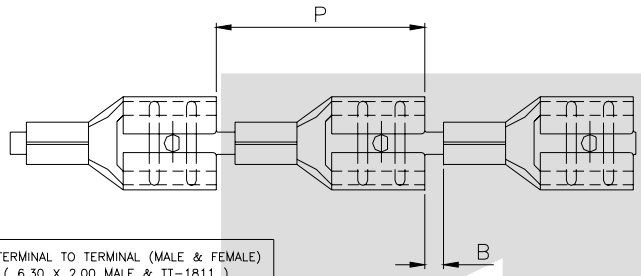

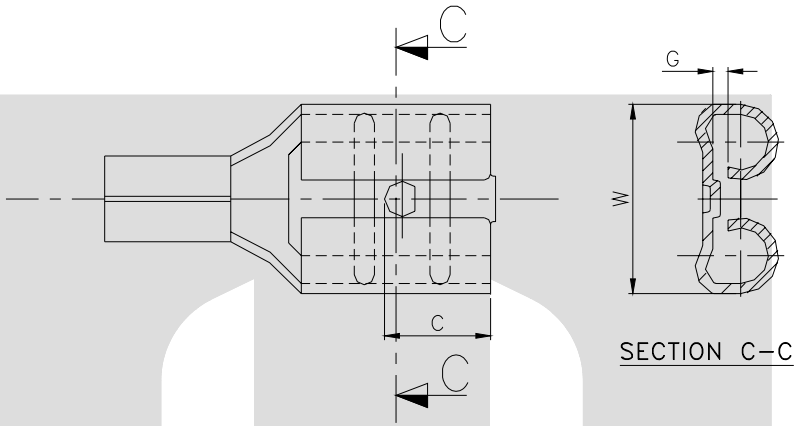

SECTION C–C

TERMINAL TO TERMINAL (MALE & FEMALE) (6.30 X 2.00 MALE & TT–1811)		
DESCRIPTION	AT 1ST INSERTION	AT 10TH WITHDRAWAL
PUSH LOAD MAX.	N A	
PULL LOAD MIN.		N A
MAX. MV. DROP AT 10A	N A	
MAX. MV. DROP AT 10A		N A

DIMENSION CLASSIFICATION	
SYMBOL	DESCRIPTION
◢	CRITICAL

CAT. NO.	L	E	H	W	G	F	◢ øD	◢ C	◢ P	◢ B
TOLERANCE	+0.3 −0.3	+0.1 −0.1	+0.1 −0.1	+0.1 −0.1	+.05 −.05	+0.1 −0.1	+0.1 −0.1	+0.1 −0.2	+.05 −.05	+0.0 −.15
TT– 1811	15.5	7.25	3.80	7.50	1.85	5.10	3.20	4.50	17.7	2.20



SECTION A–A

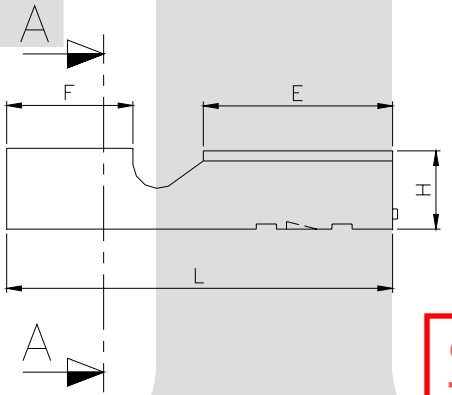

CONTROLLED COPY
TTPL

NOTES:–

MATERIAL	*70/30 BRASS*
FINISH	*NATURAL*
THICKNESS	$0.40^{\pm 0.02}$
HARDNESS IN VPN	*130 – 160*

TT–1811

TERMINAL PITCH $17.70^{+0.05}_{-0.05}$

TERMINAL INSERTION FORCE INTO COUPLER:– NA
TERMINAL WITHDRAWL FORCE INTO COUPLER:– NA

REV.NO.	AL. NO.	WAS	CHANGED TO	DATE	NAME	CHD.BY.

GEN.TOL.	
0-10	±0.10
10-30	±0.20
30-100	±0.30
100-300	±0.50

CAT.NO.	TAB SIZE	CABLE SIZE	ALL DIMENSIONS ARE IN MM
TT-1811	6.30 X 2.00	1.00-2.0 mm^2	

DRN BY	CHECKED BY	APPROVED_BY_DATE	FILENAME	DATE	SCALE
VENU	SANTOSH	SUJESH	Tt-1811	22-08-96.	3:1

TERMINAL TECHNOLOGIES (I) PVT. LTD.

SINGLE BARREL TERMINAL

DRAWING_NUMBER D/TT/48.R0

SHEET 1 OF 1