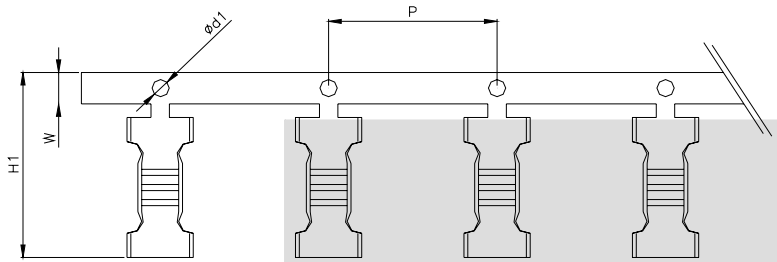



DETAIL B





SECTION D–D

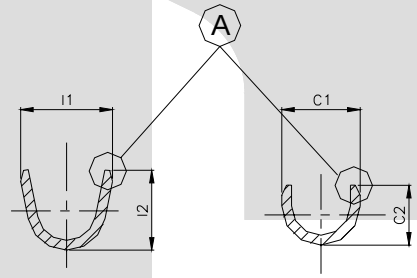

SECTION A–A

SECTION B–B





DETAIL A

DESCRIPTION	AT 1ST INSERTION	AT 10TH WITHDRAWAL
PUSH LOAD MAX.	N A	
PULL LOAD MIN.		N A
MAX. MV. DROP	N A	
MAX. MV. DROP		N A

DIMENSION CLASSIFICATION	
SYMBOL	DESCRIPTION
◢	CRITICAL

CAT. NO.	L	C1 ◢	C2 ◢	C3	I1 ◢	I2 ◢	I3	S ◢	C	D ◢	P ◢	H1	ød1	W
TOLERANCE	+0.3 −0.3	+0.2 −0.2	+0.3 −0.3	+0.1 −0.1	+0.2 −0.2	+0.3 −0.3	+0.1 −0.1	+.02 −.02	+.05 −.05	+0.3 −0.3	+.05 −.05	+0.3 −0.3	+0.1 −0.1	+0.1 −0.1
TT–1833	11.9	3.60	3.80	4.00	5.50	5.50	2.10	0.08	0.20	0.60	15.0	16.5	2.00	3.20

NOTES:–

MATERIAL	*70/30 BRASS*
FINISH	*NATURAL*
THICKNESS	*0.35* $^{\pm 0.02}$
HARDNESS IN VPN	*130 – 160*

TT–1833

CONTROLLED COPY TTPL

TERMINAL PITCH 15.00 $^{+0.05}_{-0.05}$

PLATING THICKNESS:– 1.50 MICRON MIN.IN CASE OF PLATING

REV.NO.	AL. NO.	WAS	CHANGED TO	DATE	NAME	CHD.BY.

GEN.TOL.	
0-10	±0.10
10-30	±0.20
30-100	±0.30
100-300	±0.50

CAT.NO.	TAB SIZE	CABLE SIZE	ALL DIMENSIONS ARE IN MM
TT–1833	NA	1.0 – 2.0mm^2	

DRN BY	CHECKED BY	APPROVED_BY_DATE	FILENAME	DATE	SCALE
VENU	SANTOSH	SUJESH	Tt–1833	19-05-97.	3:1

TT

TERMINAL TECHNOLOGIES (I) PVT. LTD.

JOINT TERMINAL

DRAWING_NUMBER D/TT/123.R0

SHEET 1 OF 1

ISSUE NO–1/17–10–02