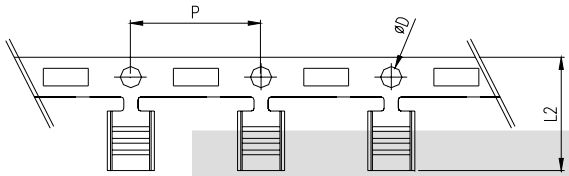



SECTION C–C





DETAIL B



SECTION D–D



DETAIL A

PUSH PULL RESULT		
DESCRIPTION	AT 1ST INSERTION	AT 10TH WITHDRAWAL
PUSH LOAD MAX.	N A.	
PULL LOAD MIN.		N A.
MAX. MV. DROP AT 4A	N.A	
MAX. MV. DROP AT 4A		N.A

DIMENSION CLASSIFICATION	
SYMBOL	DESCRIPTION
◢	CRITICAL

CAT. NO.	L ◢	L2	W ◢	H	ØD	C	S	D	P ◢
TOLERANCE	+0.3 −0.3	+0.1 −0.2	+0.3 −0.3	+0.3 −0.3	+0.1 −0.1	+0.1 −0.1	+.04 −.04	+0.3 −0.3	+.05 −.05
TT– 1835	5.40	10.2	4.00	4.20	2.00	0.20	0.10	0.50	11.0

NOTES:–

MATERIAL	*70/30 BRASS*
FINISH	*NATURAL*
THICKNESS	$0.40^{\pm 0.02}$
HARDNESS IN VPN	*130 – 160*

TT–1835

TERMINAL PITCH $11.00^{+0.05}_{-0.05}$

PLATING THICKNESS:– 1.50 MICRON MIN.IN CASE OF PLATING

CONTROLLED COPY
TTPL

REV.NO.	AL. NO.	WAS	CHANGED TO	DATE	NAME	CHD.BY.

GEN.TOL	
0-10	±0.10
10-30	±0.20
30-100	±0.30
100-300	±0.50

CAT.NO.	TAB SIZE	CABLE SIZE	ALL DIMENSIONS ARE IN MM
TT-1835	----------	1.0 – 3.0mm ^{2}	

DRN. BY	CHECKED BY	APPROVED_BY_DATE	FILENAME	DATE	SCALE
VENU	SANTOSH	SUJESH	Tt-1835	19-04-99	3:1

TERMINAL TECHNOLOGIES (I) PVT. LTD.

JOINT TERMINAL (CENTRE SPLICE)

DRAWING_NUMBER D/TT/125.RO SHEET 1 OF 1

ISSUE NO–1/17–10–02