

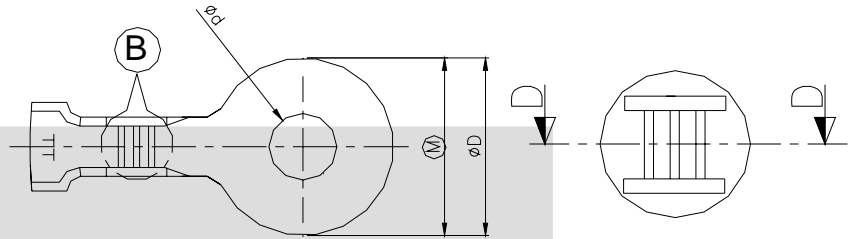




CONTROLLED COPY
TTPL

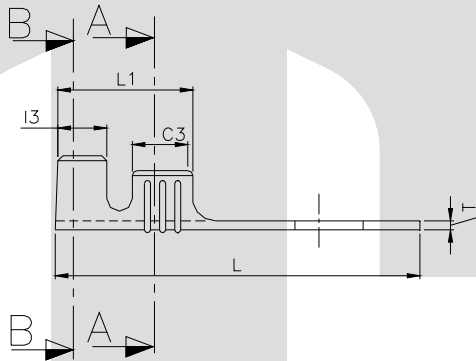

DESCRIPTION	AT 1ST INSERTION	AT 10TH WITHDRAWAL
PUSH LOAD MAX.	N A	
PULL LOAD MIN.		N A
MAX. MV. DROP AT 4A	N A	
MAX. MV. DROP AT 4A		N A

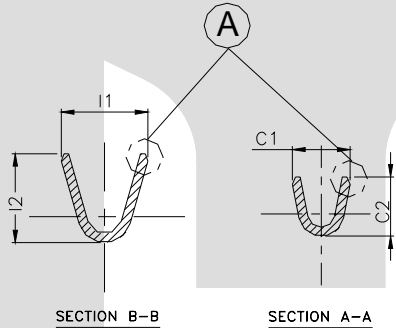


DIMENSION CLASSIFICATION	
SYMBOL	DESCRIPTION
▲	CRITICAL

CAT NO.	L	øD	ød	T	I1	I2	C1	C2	C3	I3	C	S	D	L1	P	B
T O L E R A N C E	±0.20 -0.20	±0.10 -0.10	±0.10 -0.10	±0.02 -0.02	±0.1 -0.1	±0.3 -0.3	±0.2 -0.2	±0.3 -0.3	±0.10 -0.10	±0.10 -0.10	±0.10 -0.20	±0.04 -0.04	±0.3 -0.3	±0.10 -0.10	+0.05 -0.05	+0.00 -0.10
TT-1846	24.0	12.0	6.40	0.60	5.00	5.00	3.80	4.00	4.10	3.00	0.30	0.12	0.60	9.00	25.50	1.50

NOTES:-

MATERIAL	63/37 BRASS
FINISH	NATURAL
THICKNESS	0.60±0.02
HARDNESS IN VPN	115 - 135

TT-1846



TERMINAL PITCH 25.50 ^{+0.05}/_{-0.05}

PLATING THICKNESS:- 1.50 MICRON MIN. IN CASE OF PLATING

TERMINAL INSERTION FORCE INTO COUPLER:- NA
TERMINAL WITHDRAWAL FORCE FROM COUPLER:- NA

03	I1	+/-0.2	+/-0.1	08/07/06	AM	AM	188		
02	RM Grade	70/30 Grade	63/37 Grade	01/04/06	AM	Venu	--		
01	L1	NOT SHOWN	SHOWN	10/7/04	BN	BN	102		
REV. NO.	AL. NO.	WAS		CHANGED TO		DATE	NAME	CHD. BY.	ECN NO.
GEN. TOL.	CAT NO	TAB SIZE	CABLE SIZE		ALL DIMENSIONS ARE IN MM				
0-10 ±0.10	TT-1846	N A	0.75 - 2.0 mm ²						
10-30 ±0.20	DRN. BY	CHECKED BY	APPROVED BY DATE	FILENAME	DATE	SCALE			
30-100 ±0.30	VENU	SANTOSH	SUJESH	TT-1846	19-2-2000	2:1			
100-300 ±0.50				RING TERMINAL					
				TERMINAL TECHNOLOGIES (I) PVT. LTD.	DRAWING_NUMBER	D/TT/86/R02	SHEET	1 OF 1	