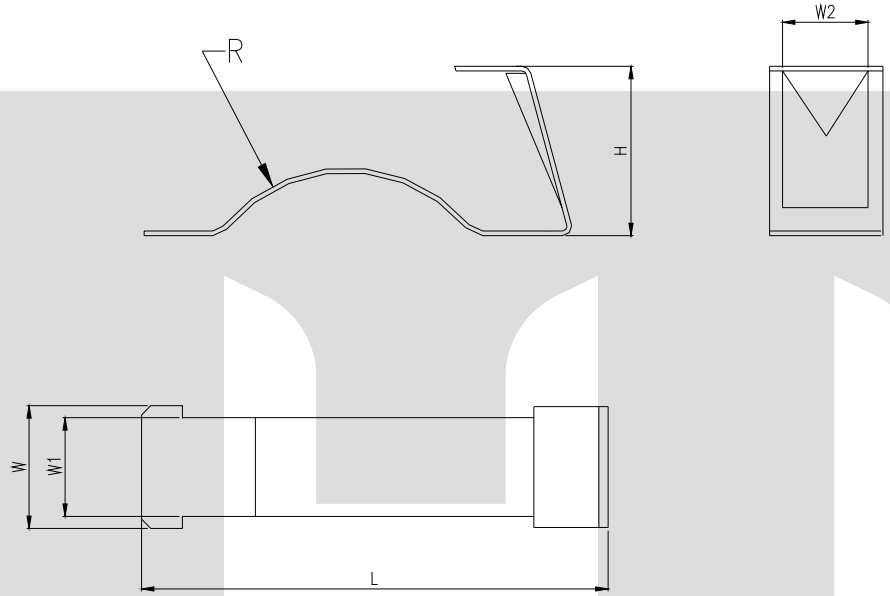

DESCRIPTION	AT 1ST INSERTION	AT 10TH WITHDRAWAL
PUSH LOAD MAX.	N A	
PULL LOAD MIN.		N A
MAX. MV. DROP	N A	
MAX. MV. DROP		N A

DIMENSION CLASSIFICATION	
SYMBOL	DESCRIPTION
◢	CRITICAL

CAT. NO.	L	W	W1 ◢	W2 ◢	H ◢	R ◢
TOLERANCE	+0.3 −0.3	+0.1 −0.1	+0.1 −0.1	+0.1 −0.1	+0.1 −0.1	+0.1 −0.1
TT− 1895	23.0	6.60	5.60	4.60	9.10	8.37

CONTROLLED COPY
TTPL

NOTES:−

MATERIAL	70/30 BRASS
FINISH	NATURAL
THICKNESS	$0.25^{\pm 0.02}$
HARDNESS IN VPN	130 − 160

TT− 1895

TERMINAL PITCH $9.00^{+0.05}_{-0.05}$

PLATING THICKNESS:− 1.50 MICRON MIN.IN CASE OF PLATING
TERMINAL INSERTION FORCE INTO COUPLER:− 1.50KG.MAX.
TERMINAL WITHDRAWAL FORCE FROM COUPLER:− 6.00 KG. MIN.

REV.NO.	AL. NO.	WAS	CHANGED TO	DATE	NAME	CHD.BY.

GEN.TOL.	
0-10	±0.10
10-30	±0.20
30-100	±0.30
100-300	±0.50

CAT.NO.	TAB SIZE	CABLE SIZE	ALL DIMENSIONS ARE IN MM
TT-1895	----	ϕ 0.60 mm²	

DRN. BY	CHECKED BY	APPROVED_BY_DATE	FILENAME	DATE	SCALE
VENU	SANTOSH	SUJESH	Tt-1895	01-04-2001	4:1

TERMINAL TECHNOLOGIES (I) PVT. LTD.

CONTACT STRIP

DRAWING_NUMBER D/TT/147,R0 | SHEET 1 OF 1

ISSUE NO−1/17−10−02