
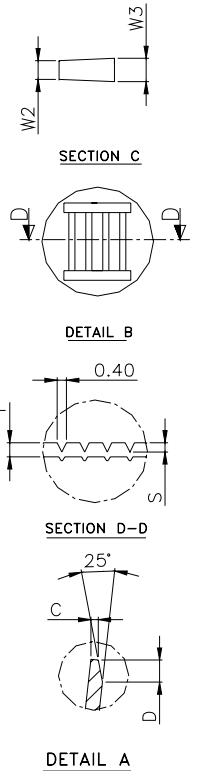
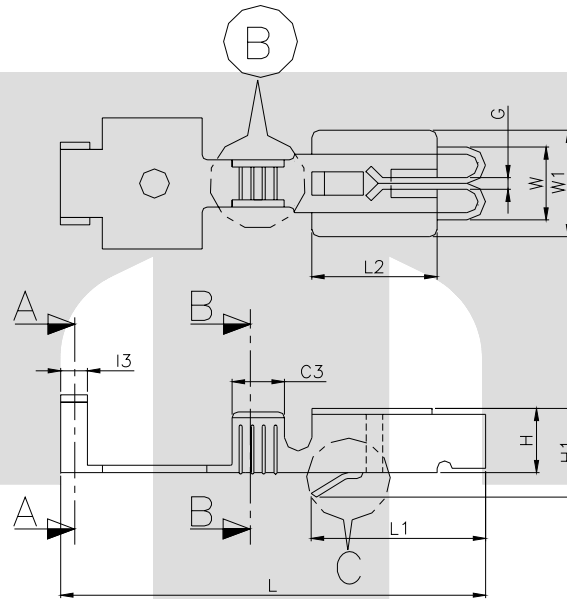


DESCRIPTION	AT 1ST INSERTION	AT 10TH WITHDRAWAL
PUSH LOAD MAX.	N A	
PULL LOAD MIN.		N A
MAX. MV. DROP	N A	
MAX. MV. DROP		N A

DIMENSION SYMBOL	CLASSIFICATION DESCRIPTION
▲	CRITICAL

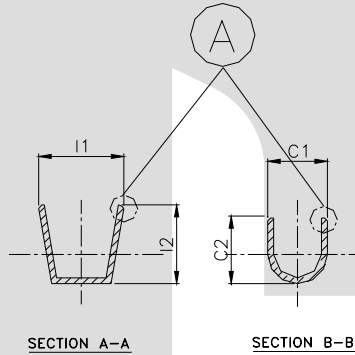

CAT. NO.	L	L1	L2	W	W1	H	H1	C1	C2	I1	I2	C3	I3	C	S	G	D	P	ød1	W2	W3
TOLERANCE	±0.30 -0.30	±0.30 -0.30	±0.15 -0.15	±0.20 -0.20	±0.10 -0.20	±0.10 -0.20	±0.15 -0.15	±0.20 -0.20	±0.30 -0.30	±0.20 -0.30	±0.30 -0.30	±0.10 -0.10	±0.10 -0.10	±0.05 -0.05	±0.04 -0.04	±0.05 -0.05	±0.30 -0.30	±0.05 -0.05	±0.10 -0.10	±0.20 -0.20	±0.20 -0.20
TT-1920	28.20	11.50	8.30	05.20	06.50	04.50	06.00	04.50	04.40	07.00	05.80	03.60	01.75	00.25	00.10	00.80	00.50	12.25	2.00	1.60	2.00

CONTROLLED COPY
TTPL

NOTES:-

MATERIAL	70/30 BRASS
FINISH	TIN
THICKNESS	0.40 ^{±0.02}
HARDNESS IN VPN	115 - 135

TT-1920

TERMINAL PITCH 12.25^{+0.05}/_{-0.05}
 PLATING THICKNESS:- 1.50 MICRON MIN.
 INSERTION FORCE (TERMINAL TO COUPLER) :- 3.0 KG MAX.
 WITHDRAWL FORCE (TERMINAL TO COUPLER):- 6.0 KG MIN.

04	P, ød1, W2, W3	--	New Dimension Added.	07/02/05	AM	PSB	128	
03	No. of Serration	3	4	13/12/04	AM	BN	115	
02	Tol. L1, C3	+0.20, 3.50	+0.30, 3.60	25-06-04	AM	BN	97	
02	NEW	DIMENSION ADDED		L2 = 8.30 ^{+0.15} / _{-0.15}	25-06-04	AM	BN	97
01	C2	4.50	4.40	22-7-03	VENU	BN	29	
01	TOL.-W1, H1, C1, I1	±0.00, ±0.10, ±0.30, ±0.30	±0.10, ±0.15, ±0.20, ±0.20	22-7-03	VENU	BN	29	
01	C, S, G	NOT SHOWN	0.25, 0.10, 0.80	22-7-03	VENU	BN	29	
REV. NO.	AL. NO.	WAS	CHANGED TO	DATE	NAME	CHD. BY.	CHD. BY.	
GEN TOL.	CAT. NO.	CABLE SIZE	ALL DIMENSIONS ARE IN MM		AS PER TERMINAL REFERENCE			
0-10 ±0.10	TT-1920	2.0 - 4.0 mm ²						
10-30 ±0.20	DRN BY VENU	CHECKED BY SANTOSH	APPROVED_BY_DATE SUJESH	FILENAME TT-1920	DATE 01-05-2001	SCALE 3:1		
30-100 ±0.30	TT		FUSE TERMINAL					
100-300 ±0.50	TERMINAL TECHNOLOGIES (I) PVT. LTD.		DRAWING_NUMBER	D/TT/134.R04		SHEET 1 OF 1		