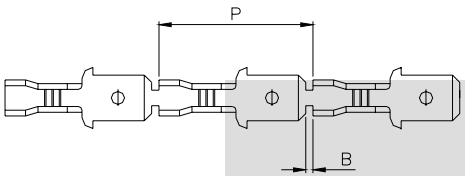

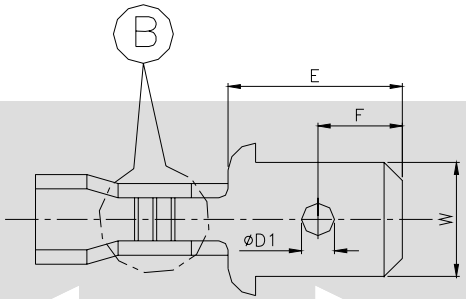



DETAIL B

TERMINAL TO TERMINAL (6.30 X 0.80 mm FEMALE WITH TT-1969)		
DESCRIPTION	AT 1ST INSERTION	AT 10TH WITHDRAWAL
PUSH LOAD MAX.	N A	
PULL LOAD MIN.		NA
MAX. MV. DROP AT 10A	N A	
MAX. MV. DROP AT 10A		N A

DIMENSION CLASSIFICATION	
SYMBOL	DESCRIPTION
◢	CRITICAL



SECTION A–A

SECTION B–B

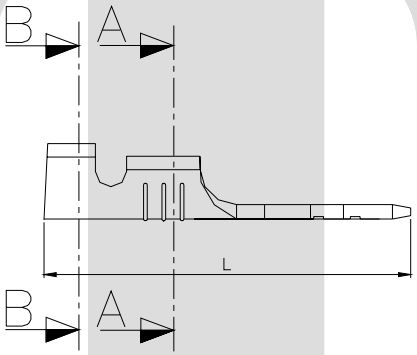



SECTION D–D



DETAIL A

CAT NO.	W	L	E	C1	C2	I1	I2	F	øD1	C	S	D	P	B
TOLERANCE	+0.1 −0.1	+0.3 −0.3	+0.1 −0.1	+0.3 −0.3	+0.3 −0.3	+0.3 −0.3	+0.3 −0.3	+0.1 −0.1	+0.1 −0.1	+0.2 −0.2	+.05 −.05	+0.3 −0.3	+.05 −.05	+.00 −.15
TT-1969	6.30	20.2	9.80	4.00	3.80	5.10	4.80	04.0	1.80	0.40	0.20	0.50	22.0	1.80

CONTROLLED COPY
TTPL

NOTES:–

MATERIAL	70/30 BRASS
FINISH	NATURAL
THICKNESS	$0.80^{\pm 0.02}$
HARDNESS IN VPN	115–135

TT–1969

TERMINAL PITCH $22.00^{+0.05}_{-0.05}$

PLATING THICKNESS:– 1.50 MICRON MIN.IN CASE OF PLATING

REV.NO.	AL. NO.	WAS	CHANGED TO	DATE	NAME	CHD.BY.

GEN.TOL.		CAT.NO.	TAB SIZE	CABLE SIZE	ALL DIMENSIONS ARE IN MM
0-10	±0.10	TT-1969	6.3 X 0.80	1.00-1.50 mm^2	
10-30	±0.20	DRN. BY VENU	CHECKED BY SANTOSH	APPROVED_BY_DATE SUJESH	FILENAME TT-1969
30-100	±0.30				DATE 19-04-96
100-300	±0.50				SCALE 3:1

TERMINAL TECHNOLOGIES (I) PVT. LTD.

MALE TAB WITHOUT LANCING

DRAWING_NUMBER D/TT/13,R0

SHEET 1 OF 1

ISSUE NO–1/17–10–02