TERMINAL TO TERMINAL TEST REPORT		
DESCRIPTION	AT 1ST INSERTION	AT 10TH WITHDRAWAL
PUSH LOAD MAX.	N A	
PULL LOAD MIN.		N A
MAX. MV. DROP AT 4A	N A	
MAX. MV. DROP AT 4A		N A

DIMENSION CLASSIFICATION	
SYMBOL	DESCRIPTION
◢	CRITICAL

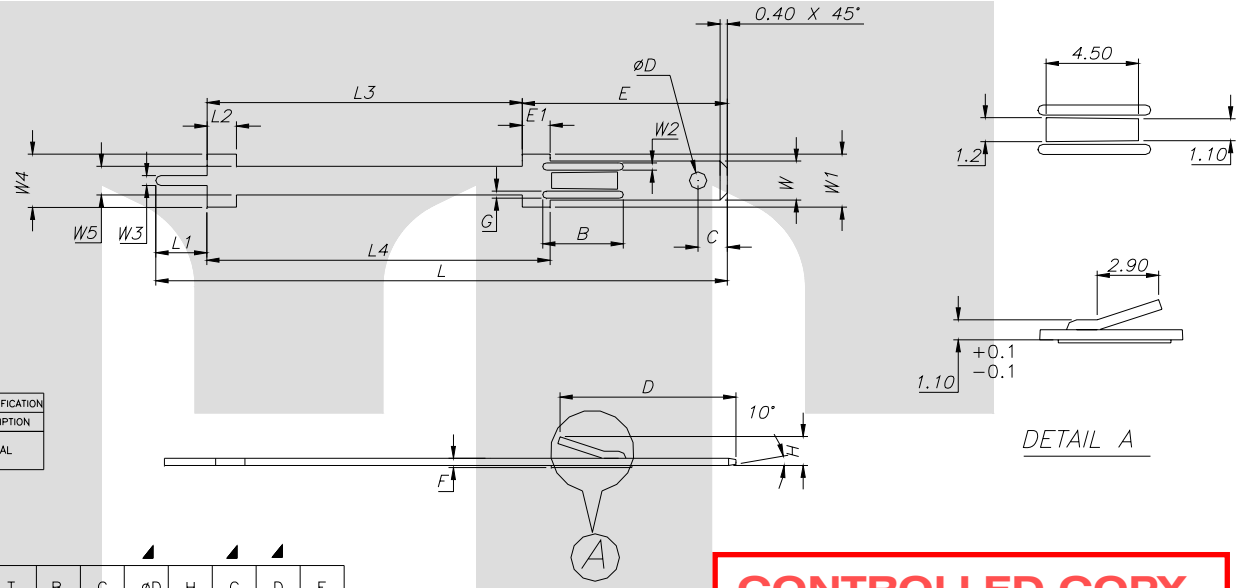

CAT. NO.	L	L1	L2	L3	L4	E	E1	W	W1	W2	W3	W4	W5	T	B	G	øD	H	C	D	F
TOLERANCE	+0.2 −0.2	+0.0 −0.2	+0.1 −0.1	+0.1 −0.1	+0.1 −0.1	+0.1 −0.1	+0.1 −0.1	+.05 −0.1	+0.0 −0.2	+0.1 −0.1	+0.0 −0.1	+0.0 −0.2	+0.1 −0.1	+.02 −.02	+0.1 −0.1	+0.1 −0.1	+0.1 −0.1	+0.1 −0.1	+0.1 −0.1	+.15 −.15	+0.0 −.05
TT− 1986	39.0	3.50	2.00	21.5	23.5	14.0	2.00	2.80	3.80	0.50	0.80	3.80	2.00	0.50	5.50	0.50	1.20	2.00	2.00	12.0	0.65

CONTROLLED COPY
TTPL

NOTES:−

MATERIAL	70/30 BRASS
FINISH	NATURAL
THICKNESS	$0.50^{\pm 0.02}$
HARDNESS IN VPN	130 − 150

TT−1986

TERMINAL PITCH $41.0^{+0.05}_{-0.05}$

PLATING THICKNESS:− 1.50 MICRON MIN.IN CASE OF PLATING
TERMINAL INSERTION FORCE INTO COUPLER:− 1.50KG.MAX.
TERMINAL WITHDRAWL FORCE INTO COUPLER:− 6.00.KG.MIN.

REV.NO.	AL. NO.	WAS	CHANGED TO	DATE	NAME	CHD.BY.

GEN.TOL.		CAT.NO.	TAB SIZE	CABLE SIZE	ALL DIMENSIONS ARE IN MM
0-10	±0.10	TT-1986	2.8 X 0.5	NA	
10-30	±0.20	DRN. BY: VENU	CHECKED BY: SANTOSH	APPROVED_BY_DATE: SUJESH	FILENAME: Tt-1986
30-100	±0.30	DATE: 21-10.03	SCALE: 3:1		
100-300	±0.50	TERMINAL TECHNOLOGIES (I) PVT. LTD.	MALE TAB WITH LANCING		
			DRAWING_NUMBER: D/TT/212 R0	SHEET: 1 OF 1	

ISSUE NO−1/17−10−02