
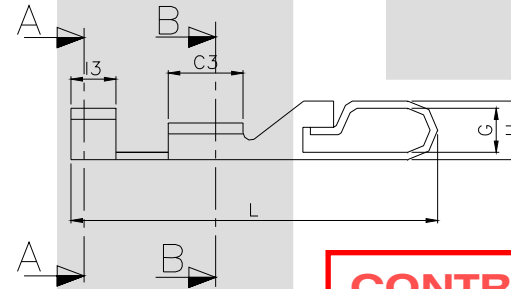


DETAIL A

DESCRIPTION	AT 1ST INSERTION	AT 10TH WITHDRAWAL
PUSH LOAD MAX.	3.50 KG.	
PULL LOAD MIN.		2.50 KG
MAX. MV. DROP AT 10A	N A.	
MAX. MV. DROP AT 10A		N A.

DIMENSION CLASSIFICATION	
SYMBOL	DESCRIPTION
▲	CRITICAL



CONTROLLED COPY
TTPL

CAT. NO.	L	E	C1	C2	C3	I1	I2	I3	H	W	B	G	C	D	P
TOLERANCE	+0.3 -0.3	+0.15 -0.15	+0.2 -0.2	+0.2 -0.2	+0.1 -0.1	+0.2 -0.2	+0.2 -0.2	+0.1 -0.1	+0.1 -0.05	+0.15 -0.15	+0.3 -0.0	+0.08 -0.08	+0.1 -0.2	+0.3 -0.3	+0.05 -0.05
TT- 2732	25.4	8.60	3.00	3.00	5.20	3.50	3.80	3.60	3.90	8.10	9.50	2.90	0.30	0.50	19.0

NOTES:-

MATERIAL	P B
FINISH	NATURAL
THICKNESS	0.50 ^{+0.02}
HARDNESS IN VHN	130-160

TT-2732

UNSPECIFIED RADIUS IS 0.3
 UNSPECIFIED CHAMFER IS 0.5
 TERMINAL PITCH 19.00^{+0.05}_{-0.05}

PLATING THICKNESS:- 1.50 MICRON MIN.IN CASE OF PLATING

GAUGE TO BE CHECKED WITH PLUG GAUGE
 GO= 2.812 mm
 NO GO = 2.985 mm

TERMINAL INSERTION FORCE INTO COUPLER:- 2.0 KG. MAX.
 TERMINAL WITHDRAWAL FORCE FROM COUPLER:- 6.0 KG. MIN.

01	B	9.50 ^{+0.15} _{-0.0}	9.80 ^{+0.3} _{-0.0}	28/08/04	AM	BN	108
REV. NO.	AL. NO.	WAS	CHANGED TO	DATE	NAME	CHD. BY.	ECN NO.
GEN TOL.	CAT NO.	TAB SIZE	CABLE SIZE	ALL DIMENSIONS ARE IN MM			
0-10 ±0.10	TT-2732	φ3.00	0.5-0.75 mm ²				
10-30 ±0.20	DRN BY	CHECKED BY	APPROVED_BY_DATE	FILENAME	DATE	SCALE	
	VENU			Tt-2732	05-12-03	3:1	
30-100 ±0.30	TT			COMPRESSOR TERMINAL			
100-300 ±0.50	TERMINAL TECHNOLOGIES (I) PVT. LTD.		DRAWING_NUMBER	D/TT/221,R01	SHEET 1 OF 1		