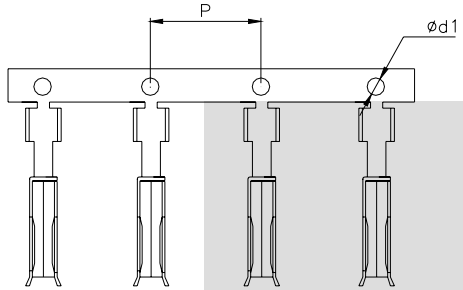





DETAIL A

DESCRIPTION	AT 1ST INSERTION	AT 10TH WITHDRAWAL
PUSH LOAD MAX.	3.5 Kg. Max.	
PULL LOAD MIN.		1.5 Kg. Min.
MAX. MV. DROP	N A	
MAX. MV. DROP		N A



SECTION A–A

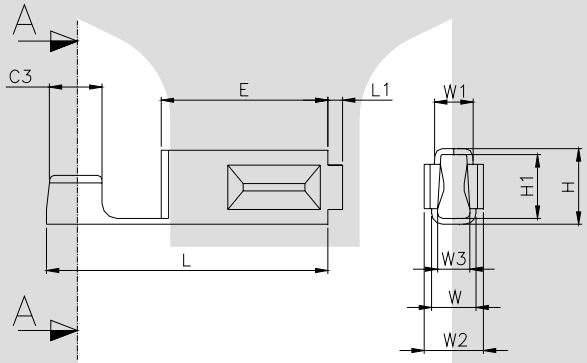

DIMENSION CLASSIFICATION	
SYMBOL	DESCRIPTION
◢	CRITICAL

CAT. NO.	L	L1	E	H	H1	W	W1 ◢	W2 ◢	W3	C1	C2	C3	C4	H2	C	D	P ◢	Ød1
TOLERANCE	+0.3 −0.3	+0.1 −0.1	+0.1 −0.1	+.15 −.15	+0.2 −0.2	+0.1 −0.1	+0.2 −0.1	+0.1 −0.2	+0.2 −0.2	+0.2 −0.3	+0.2 −0.2	+0.1 −0.1	+0.1 −0.2	+.05 −.05	+0.1 −0.1	+0.3 −0.3	+.05 −.05	+.05 −.05
TT– 2901	20.0	0.75	11.5	5.20	4.20	3.00	2.90	3.90	2.00	3.50	3.50	3.70	2.20	0.25	0.25	0.60	14.0	2.00

CONTROLLED COPY
TTPL

NOTES:–

MATERIAL	*P B*
FINISH	*NATURAL*
THICKNESS	$0.40^{\pm 0.02}$
HARDNESS IN VPN	*130 – 160*

TT–2901

UNSPECIFIED RADIUS IS 0.3
UNSPECIFIED CHAMFER IS 0.5
TERMINAL PITCH $14.00^{+0.05}_{-0.05}$

PLATING THICKNESS:– 1.50 MICRON MIN.IN CASE OF PLATING

REV. NO.	AL. NO.	WAS	CHANGED TO	DATE	NAME	CHD.BY.

GEN.TOL.	
0-10	±0.10
10-30	±0.20
30-100	±0.30
100-300	±0.50

CAT.NO.	TAB SIZE	CABLE SIZE
TT-2901	4.00 X 2.00	0.50 - 1.0 mm^2

ALL DIMENSIONS ARE IN MM

DRN BY	CHECKED BY	APPROVED_BY_DATE	FILENAME	DATE	SCALE
VENU	SANTOSH	SUJESH	Tt-2901	10-07-01	3:1

TERMINAL TECHNOLOGIES (I) PVT. LTD.

CORD TERMINAL

DRAWING_NUMBER D/TT/185,R0 | SHEET 1 OF 1

ISSUE NO–1/17–10–02