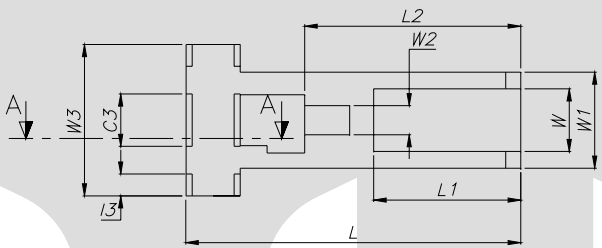



SECTION A–A

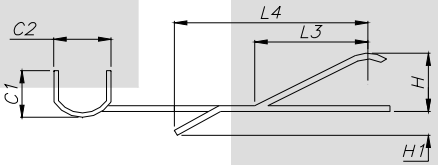

DESCRIPTION	AT 1ST INSERTION	AT 10TH WITHDRAWAL
PUSH LOAD MAX.	NA	
PULL LOAD MIN.		NA
MAX. MV. DROP	NA	
MAX. MV. DROP		NA

DIMENSION CLASSIFICATION	
SYMBOL	DESCRIPTION
◢	CRITICAL

CAT. NO.	L	L1 ◢	L2	L3 ◢	L4 ◢	W	W1	W2	W3	H ◢	H1 ◢	C1	C2	C3	I3
TOLERANCE	+0.3 −0.3	+0.1 −0.1	+0.1 −0.1	+0.1 −0.1	+0.2 −0.2	+0.1 −0.1	+0.1 −0.1	+0.1 −0.1	+0.1 −0.1	+0.2 −0.0	+0.3 −0.0	+0.3 −0.3	+0.3 −0.3	+0.1 −0.1	+0.1 −0.1
TT– 2922	22.3	9.80	14.4	8.30	12.9	4.30	6.60	2.00	10.4	4.00	1.30	3.20	3.60	3.60	1.90

NOTES:–

MATERIAL	P B
FINISH	NATURAL
THICKNESS	$0.40^{\pm 0.02}$
HARDNESS IN VPN	130 – 160

TT–2922

UNSPECIFIED RADIUS IS 0.3
UNSPECIFIED CHAMFER IS 0.5
TERMINAL PITCH 12.00 $^{+0.05}_{-0.05}$

PLATING THICKNESS:– 1.50 MICRON MIN.IN CASE OF PLATING
TERMINAL INSERTION FORCE INTO COUPLER:– 1.50KG.MAX.
TERMINAL WITHDRAWAL FORCE FROM COUPLER:– 6.00 KG. MIN.

CONTROLLED COPY
TTPL

REV.NO.	AL. NO.	WAS	CHANGED TO	DATE	NAME	CHD.BY.

GEN.TOL.		CAT.NO.	TAB SIZE	CABLE SIZE	ALL DIMENSIONS ARE IN MM
0-10	±0.10	TT-2922	----	0.50 - 1.00mm^2	
10-30	±0.20	DRN. BY VENU	CHECKED BY SANTOSH	APPROVED_BY_DATE SUJESH	FILENAME Tt-2922
30-100	±0.30				DATE 06-01-02
100-300	±0.50				SCALE 3:1

TERMINAL TECHNOLOGIES (I) PVT. LTD.

CONTACT STRIP

DRAWING_NUMBER D/TT/145,R0

SHEET 1 OF 1

ISSUE NO–1/17–10–02